



TEI-19D

Media Isolated High Accuracy Digital Output Pressure Sensor

SPECIFICATIONS

- 316L SS
- Pressure/temperature read-out
- Digital I²C Output
- ASIC calibrated
- Low-power consumption
- 19mm Diaphragm Diameter

The TEI-19D module includes an Ultra Stable piezo resistive silicon pressure sensor and an ultra-low power 24bits $\Delta\Sigma$ ADC with internal factory calibrated coefficients. It provides a precise digital pressure and temperature value and different operation modes that allow the user to optimize for conversion speed and current consumption. A high-resolution temperature output allows the implementation of a pressure/temperature function without any additional sensor.

The communication protocol is standard I2C interface, and this module can be interfaced to virtually any microcontroller.

Each module was calibrated in factory. it has been compensated offset, span of the measure pressure and temperature signal.

Features

- Thread Mount
- Up to -40°C to +85°C Operating Range
- Up to $\pm 0.2\%R$ Pressure Accuracy
- Solid State Reliability
- Low Pressure

Applications

- Industrial Ultrasonic Natural Gas Flow Meter
- OEM Equipment

CLICK HERE ›
CONNECT WITH A SPECIALIST

TEI-19D

Digital Output Pressure Sensor

Specifications

Unless otherwise specified, Supply VOLTAGE: 3VDC; Ambient Temperature: 25°C

| PARAMETERS | MIN | TYP | MAX | UNITS | NOTES | |
|------------------------------------|---|------|-----|----------|-------|---|
| PRESSURE RESOLVING | - | - | 24 | BIT | | |
| TEMPERATURE RESOLVING | - | - | 16 | BIT | | |
| INPUT VOLTAGE RANGE | 2.5 | 3 | 3.6 | VDC | 1 | |
| PRESSURE ACCURACY AT 25°C±5°C | ≥20%Pmax | -0.2 | - | 0.2 | %R | 2 |
| | <20%Pmax | -0.2 | - | 0.2 | %SPAN | |
| PRESSURE ACCURACY AT -20°C TO 65°C | ≥20%Pmax | -0.4 | - | 0.4 | %R | |
| | <20%Pmax | -0.4 | - | 0.4 | %SPAN | |
| LONG TERM STABILITY | - | 0.2 | - | %SPAN/yr | | |
| COMPENSATED TEMPERATURE RANGE | -20 | - | 65 | °C | | |
| TEMPERATURE ACCURACY | -2 | - | 2 | °C | | |
| POWER CONSUMPTION AT WORK MODE | - | - | 2 | mA | | |
| POWER CONSUMPTION AT IDLE MODE | - | - | 10 | uA | | |
| SCK FREQUENCY | - | 60 | 100 | kHz | | |
| INSULATION RESISTANCE (50 VDC) | 50M | - | - | OHM | | |
| EMC CRITERIAL | CLASS A, IEC 61000-4-2 TO 4-6 | | | - | 6 | |
| OPERATING TEMPERATURE | -40 | - | 80 | °C | | |
| STORAGE TEMPERATURE | -40 | - | 80 | °C | | |
| PRESSURE CYCLE (0-FS) | 1M | - | - | CYCLES | | |
| PRESSURE OVERLOAD | - | - | 3X | RATED | 4 | |
| PRESSURE BURST | - | - | 4X | RATED | 5 | |
| PACKAGE PROTECTION | IP65 | | | - | | |
| INTERFACE TYPE | I2C | | | - | | |
| MEDIA, PRESSURE PORT | LIQUIDS AND GASES COMPATIBLE WITH 316/316L STAINLESS STEE, AND VITON O-RING | | | | | |


Notes

- Output is not Ratiometric to Supply Voltage.
- Accuracy: combined linearity, hysteresis and repeatability.
 $\%R = (\text{Read Value} - \text{Target Value}) / \text{Target Value} * 100$; $\%S = (\text{Read Value} - \text{Target Value}) / \text{Span Value} * 100$
- Oversampling rate: 4096.
- The maximum pressure that can be applied without changing the transducer's performance or accuracy.
- The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.
- EMC performance criteria:
 - IEC 61000-4-2:2006 ESD: 8 kV air discharge; 6 kV contact discharge; 10 cycles; class A.
 - IEC 61000-4-3:2002 Radiated: E1 (80m-2000mHz), 3V/m, 80%AM 1kHz, Sine; class A.
 - IEC 61000-4-4:2004 Electrical Fast Transient (Burst): ±2 kV on DC 24V port; ±1 kV on signal; class A.
 - IEC 61000-4-6:2006 Conducted RFI: E1(0.15mHz~80mHz),3V,80%am,1kHz, Sine, dwell times 10s; DC 24V port and signal; class A.
 - IEC 61000-4-5:2005 Surge: DC port, L to L +/-1kV; L to PPE +/-2kV; 3 cycles; DC 24V port; class A.
- Device marking:
Part marked with full part number, lot number, serial number and date code.
- Maximum temperature range for product with cable is -30°C to +65°C
- Shipping requirements:
Devices are shipped individually packaged in an anti-static plastic bag and box.
The port thread is protected by a static dissipative cap.

TEI-19D

Digital Output Pressure Sensor

Dimensions

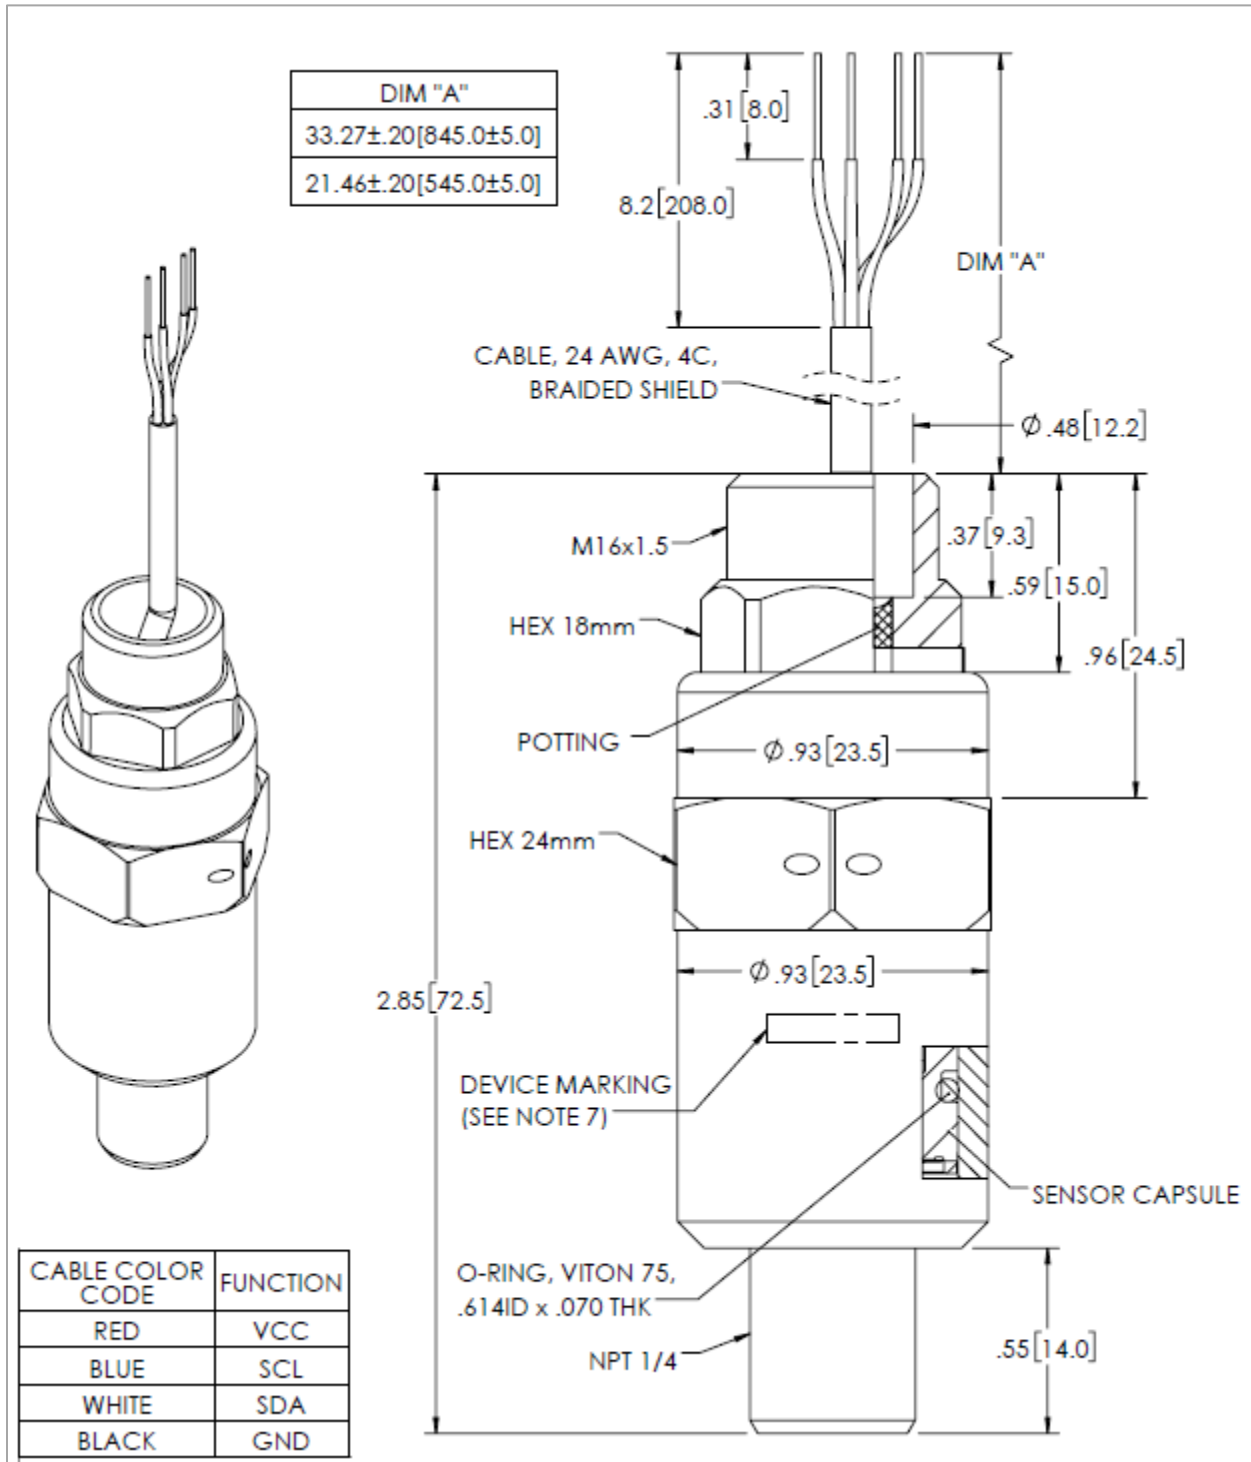

TEI-19D

Digital Output Pressure Sensor

Communication protocols

General:

It defined data output format and calculation method for pressure and temperature. TE has developed transfer PCB based on the communication protocols to complete the output conversion between TEI-19D 24bits product.

Only the Read pressure command will start conversion of pressure and temperature.

The read pressure and temperature command will return the last data but not real time data. The max sample rate is about 10Hz.

Interface

This is universal I2C communication with 7 bits I2C address (0b 1101 111x), SCK frequency is 100khz.

| Action | Addresss | Commands | Addresss | Read Data | | | | | | |
|------------------|----------|----------|----------|-----------|----|----|----|----|----|----|
| Read Pressure | 0xBE | 0X6C | 0xBF | D1 | D2 | D3 | | | | |
| Read Temperature | 0xBE | 0X54 | 0xBF | D1 | D2 | | | | | |
| Read SN | 0xBE | 0X31 | 0xBF | D1 | D2 | D3 | D4 | D5 | D6 | D7 |


User Commands

Instruction

S: START; P: STOP; RS: RESTART; D: DATA

1. READING PRESSURE

S 0XBE 0X6C RS 0XBF D1 D2 D3 P

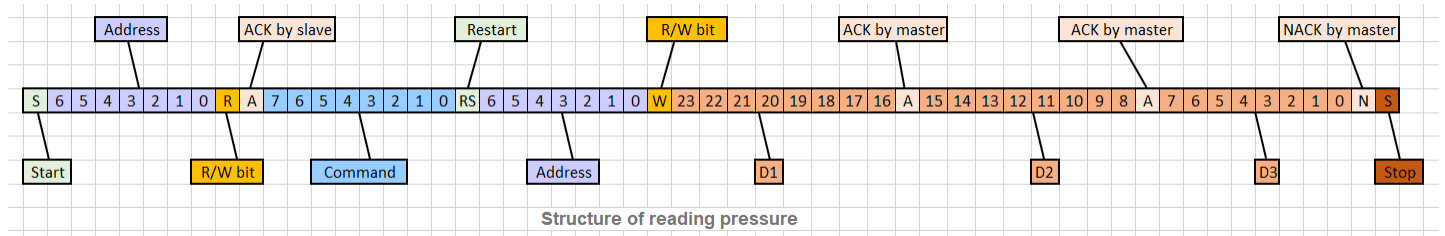

PRESSURE VALUE D1, D2, D3 (HEX)

THE LAST BIT OF D3 IS THE FLAG OF SIGN (0: + ;1: -)

CALCULATION FORMULA: $P = D1 * 256 + D2 + D3 / 256$ (NOTES: NEED TO SHIELD THE LAST BIT OF D3)

FOR EXAMPLE:

A. PRESSURE = 101.32KPA

S 0XBE 0X6C RS 0XBF 0X00 0X65 0X52 P

B. PRESSURE = -101.32KPA

S 0XBE 0X6C RS 0XBF 0X00 0X65 0X53 P

2. READING TEMPERATURE

S 0XBE 0X54 RS 0XBF D1 D2 P

TEMPERATURE VALUE D1, D2(HEX)

CALCULATION FORMULA:

TEI-19D

Digital Output Pressure Sensor

IF $D1 < 128$ THEN THE TEMPERATURE IS POSITIVE: $T = D1 + D2/256$

IF $D1 > 127$ THEN THE TEMPERATURE IS NEGATIVE: $T = -((255 - D1) + (255 - D2)/256)$

FOR EXAMPLE:

C. TEMPERATURE = 20.0 °C

S 0XBE 0X54 RS 0XBF 0X14 0X00 P

D. TEMPERATURE = -20.0 °C

S 0XBE 0X54 RS 0XBF 0XEC 0X00 P

3. READING ID (SERIES NUMBER)

S 0XBE 0X31 RS 0XBF D1 D2 D3 D4 D5 D6 D7 P

ID DEFINITION:

FOR EXAMPLE:

S 0XBE 0X31 RS 0XBF 0X20 0X18 0X03 0X15 0X04 0X14 0X21 P

2018 0315 0414 21

2018: YEAR

0315: MONTH/DATE

0414: SERIAL NUMBER

3.1: PRESSURE RANGE CODE

PRESSURE RANGE AS FOLLOW:

1: 0.2MPa;

2: 0.5MPa;

3: 1.0MPa;

4: 2.0MPa

3.2: ACCURACY CODE

ACCURACY CODE AS FOLLOW:


1: $\pm 0.2\%R$ (for $\geq 20\%P_{max}$, $25^{\circ}C \pm 5^{\circ}C$), $\pm 0.2\%F$ (for $< 20\%P_{max}$, $25^{\circ}C \pm 5^{\circ}C$);

$\pm 0.4\%R$ (for $\geq 20\%P_{max}$, $-20^{\circ}C$ to $65^{\circ}C$), $\pm 0.4\%F$ (for $< 20\%P_{max}$, $-20^{\circ}C$ to $65^{\circ}C$)

TEI-19D

Digital Output Pressure Sensor

Ordering Information

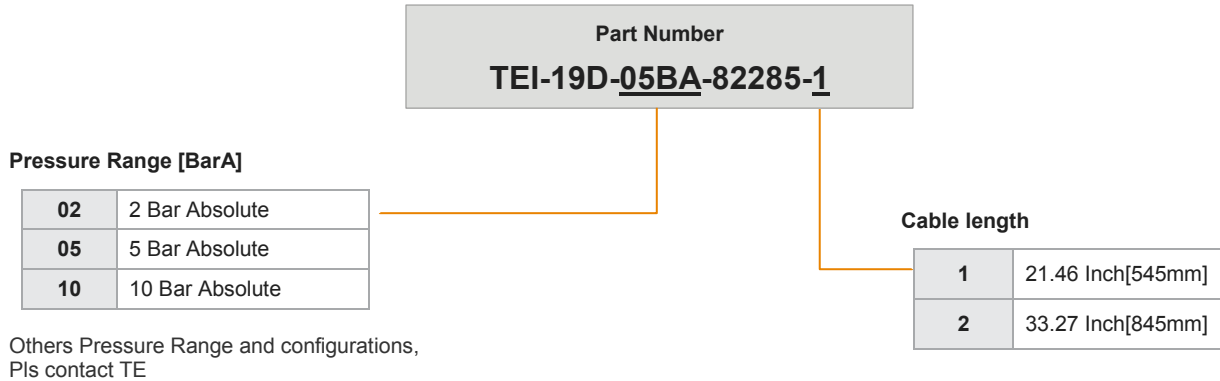

[CLICK HERE >](#)
CONNECT WITH A SPECIALIST

te.com/sensors

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2021 TE Connectivity Corporation. All Rights Reserved.

Version A7 02/2021