



KPSI 735

Submersible level transducer
 $\pm 0.05\%$ FSO static accuracy
 Two year warranty

The KPSI 735 is a submersible hydrostatic level transducer specifically designed to meet the rigorous environments encountered in liquid level measurement and control. It can be configured to perform to specifications under most adverse, reactive conditions.

Features

- Custom polyurethane or ETFE cable lengths
- Welded 316SS or titanium body
- Custom level ranges up to 700 ft. (210 m) \varnothing
- Multiple analog outputs
- Multiple nose piece styles
- Optional lifetime lightning protection
- Shipped with long life vent filter
- Available molded cable seal

All KPSI Transducers utilize a highly accurate pressure sensor assembly specifically designed for hostile fluids and gases. The assembly is integrated with supporting electronics in a durable waterproof housing constructed of 316 stainless steel or titanium. The attached electrical cable is custom manufactured and includes para-aramid synthetic fiber members to prevent errors due to cable elongation, and a unique water block feature that self-seals in the event of accidental cuts to the cable. Each transducer is shipped with a SuperDry Vent Filter that prevents moisture from entering the vent tube for at least one year without maintenance, even in the most humid environments.

Applications



- Lift stations
- Pump control
- Level control
- Surface water monitoring
- Landfill leachate
- Well monitoring
- Groundwater monitoring

Specifications


PARAMETER	COMMENT	
LEVEL RANGES		
Full Scale Level Ranges (Intermediate level ranges are available)	12 thru 700 ft. H ₂ O (4 thru 210 m H ₂ O)	Vented Gage Reference
	N/A	Sealed Gage Reference
	N/A	Absolute Gage Reference
Proof Pressure	1.5 x FS	
Burst Pressure	2.0 x FS	
STATIC PERFORMANCE		
Static Accuracy (combined effects of non-linearity, hysteresis and repeatability, best fit straight line method)	$\pm 0.05\%$ FSO	BFSL method
Resolution	+0.0001% FS	

ENVIRONMENTAL		
Wetted Materials	316 SS or Titanium; POM; FKM; Polyurethane or ETFE	
Compensated Temp Range	0 to 50°C	
Thermal Error (Maximum allowable deviation from the Best Fit Straight Line due to a change in temperature)	±0.05% FSO/°C	
Operating Temp Range	-20 to 60 °C	When attached to polyurethane cable
Protection Rating	IP 68, NEMA 6P	
ELECTRICAL		
Excitation	9-28 V – VDC output	0-5 V, 0-2.5 V, 0-4 V
	9-28 V – mA output	4-20
	15-28 V – VDC output	0-10 V
	10-28 V – VDC output	1.5-7.5 V
Input Current	20 mA max.	For mA output
	3.5 mA max.	For VDC output
Output	4-20 mA, 0-5 VDC, 0-2.5 VDC, 0-4 VDC, 0-10 VDC, 1.5-7.5 VDC	
Zero Offset	±0.25 mA for mA output < 0.25 VDC for VDC output	
Output Impedance	See loop diagram for mA output 20 ohm for VDC output	
Insulation Resistance	100 mega ohm at 50 VDC	
Circuit Protection	Polarity, surge/shorted output	
CERTIFICATIONS		
	CE compliant	EN 61326-1:2013 and 61326-2-3:2013
	UL, CUL and FM	Class I, II, III, Div. 1, Groups A,B,C,D,E,F&G
	WEEE/RoHS	Waste from Electrical and Electronic Equipment (WEEE) and Restrictions on the use of Hazardous Substances (RoHS)
PHYSICAL		
Approximate Weight	0.44 lbs. (198 g) transducer	
	0.05 lbs./ft. (79 g/m) cable	
Cable Jacket Material	Polyurethane (Standard) ETFE (Optional)	
Cable Pull Strength	200 lbs. (90 kg)	
Cable Number of Conductors	4	
Cable Conductor Size	22 AWG	
Cable Seal	Molded Polyurethane	For polyurethane cable
	FKM Gland	For ETFE cable
TEMPERATURE OUTPUT OPTION (Not intrinsically safety approved)		
Temperature Range	-20 to 60°C	Available for 4-20mA output versions only
Output Signal	4-20mA	
Temperature Measurement Accuracy	±4°C	± 1°C with single point calibration
LIGHTNING PROTECTION (Power supply needs to be limited to 150mA to avoid lock up of the gas tube after a suppression event)		
Life Expectancy	>1,000 Operations	
Peak Clamping Voltage	36 Volts	
Response Time	<10 nsecs	
Shunts	20,000 Amperes	

Dimensions

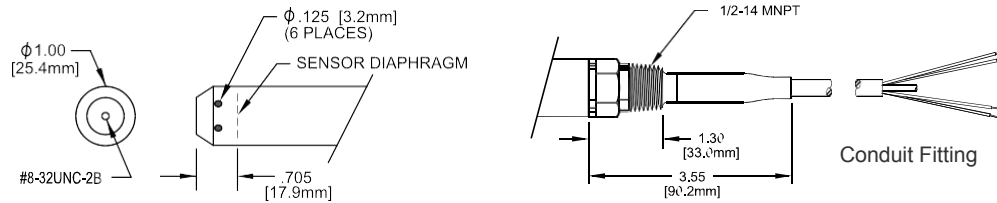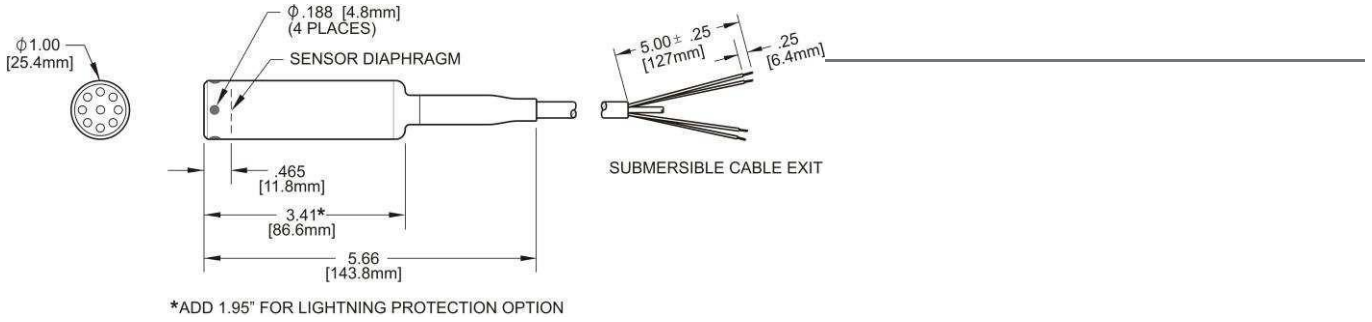


Molded Cable Seal Configuration for Polyurethane Cable

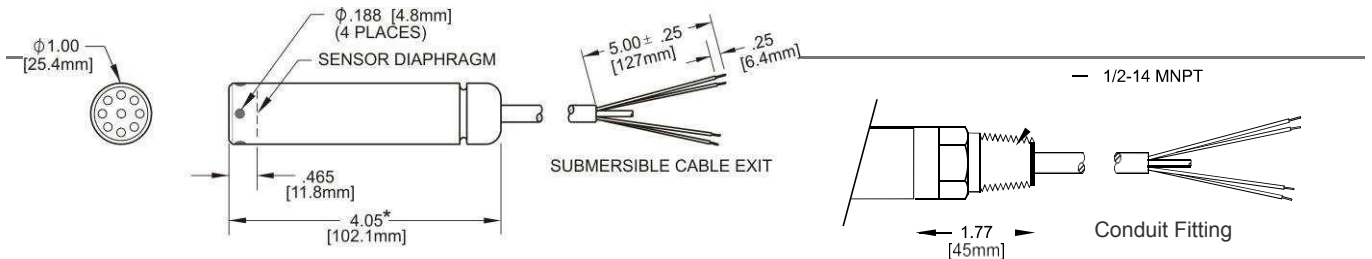

Gland Cable Seal Configuration for ETFE Cable

Electrical Termination / Loop Resistance

ELECTRICAL TERMINATION		
22AWG CONDUCTORS IN A SHIELDED CABLE WITH VENT TUBE		
4-20 mA	RED	+ EXCITATION
	BLACK	- EXCITATION
0-5 VDC	RED	+ EXCITATION
	BLACK	- EXCITATION
	WHITE	+ SIGNAL
ALL	DRAIN WIRE	SHIELD

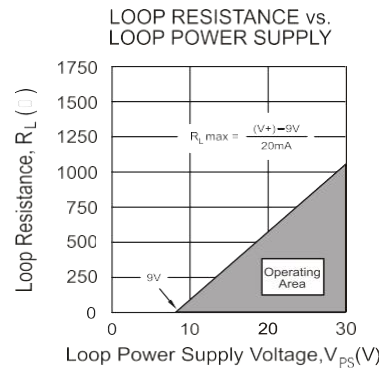

订购信息

类型		潜入式水位传感器	
7	3	5	±0.05 FSO%精度
↓	↓	↓	
材料			
S	不锈钢		
T	钛		
↓			
压力类型			
1	表压		
↓	输出		
3	0 - 5VDC		
F	0 - 2.5VDC		
G	0 - 4VDC		
H	0 - 10VDC		
J	1.5 - 7.5 VDC		
4	4 - 20mA		
6	4 - 20mA温度范围可选		
↓	压力连接口		
A	敞口式帽盖		
B	带气孔的帽盖		
E	测压帽盖		
2	1/4" -18NPT 螺纹外接头		
7	1/2" -14NPT 螺纹外接头		
↓	电气连接口		
0	密封电缆		
4	密封电缆1/2" -14NPT外螺纹接头		
A	密封压盖电缆		
B	密封压盖电缆1/2" -14NPT外螺纹接头		
↓	防雷电保护		
A	不防雷电		
B	防雷电保护		
↓	最大输出时水位		
#	#	#	#
↓	↓	↓	↓
最小输出时水位			
#	#	#	#
↓	↓	↓	↓
防潮保护			
B	通风过滤器		
D	不锈钢通风过滤器		
↓	电缆类型		
1	聚氨酯		
2	ETFE(电子接口只能选A or B)		
↓	电缆长度		
#	#	#	#
↓	↓	↓	↓
标签			
A	psi		
B	ftH: 0		
C	mH: 0		

Notes: 1 The part number requires two level range limits, corresponding to the maximum and minimum analog outputs of the transducer, to be specified in pounds per square inch (psi) to three decimal places. The lower level range is typically 000.000 unless otherwise required. For reverse output requirements, enter the lower level range for the maximum output signal and the upper range for the minimum output. Use the following conversion factors: Ft. H₂O / 2.3073 = psi // m H₂O / 0.703265 = psi
 Examples: 10 ft. H₂O / 2.3073 = 4.334 psi (Enter 004.334 in the part number), 10 m H₂O / 0.703265 = 14.219 psi (Enter 014.219 in the part number)
 For sealed gage reference add local atmosphere when converting to psi. Contact PSI for assistance.
 Example: 10 ft. H₂O / 2.3073 + 14.7 = 19.034 psi (Enter 019.034 in the part number)

2 Units of measure on standard MEAS label. Contact Measurement Specialties if private labeling is required.